

MDM-7016

CWDM Multiplexer & Demultiplexer



DATASHEET

FIBER OPTICS



Features

- Supports 16 different CWDM wavelengths
- Singlemode fiber
- Minimization of optical fiber for Add/Drop
- Low insertion loss
- No EMI, RFI, or Ground Loops
- Passive CWDM
- 3-Year Warranty

Applications

- Nodes in dual-redundant fiber rings
- Minimize fiber runs
- Add signals to existing fiber network

CWDM Multiplexing & Demultiplexing over Fiber

The MDM-7016 supports up to 16 CWDM wavelengths onto or from a common singlemode optical fiber. Supported wavelengths range from 1270 nm to 1610 nm. Requires 2 open slots in an Optiva chassis.

The MDM-7016 is most typically used in rings, or other network topologies, in which particular directed video, audio, and data signals are sourced and terminated at nodes on a network that are characterized by a particular optical wavelength. As 16 CWDM wavelengths are supported, up to 16 nodes may be addressed on such a CWDM ring. The MDM-7016 would typically be used at a central node or control center that is required to add up to 16 and/or remove up to 16 wavelengths to a single fiber. Baseband digital bandwidths of up to 3.125 Gbps per wavelength are supported. As a result, up to 25 Gbps may be transported on a CWDM network, with any particular node being capable of adding and/or dropping 3.125 Gbps.

In addition, the MDM-7016 is part of our innovative Optiva video, audio and data media transport system. New signals may be added without the need for additional fiber through our proprietary daisy-chain technology.

System Design

MDM-7016 is a card-based form factor multiplexer designed for use in Optiva enclosures. It utilizes two insert card slots

optiva | PLATFORM

in 19" rackmount and compact tabletop or wall-mountable enclosures. The 3RU 19" rackmount enclosures (Models: OT-CC-16 & OT-CC-16F) can support up to 16 insert cards as well as dual-redundant, hot-swappable power supplies utilizing two 100 watt or two 200 watt power supplies. Also available in the rackmount form factor is our 1RU enclosure (Model: OT-CC-6-1U) which can accommodate six insert cards and utilizes two 60 watt power supplies. For desktop or wall mounting applications there is a two-slot (Model: OT-DTCR-2) enclosure that uses an external wall mount power supply.

U.S. Patent #'s 7720385 & 8064773

MDM-7016


CWDM Multiplexer & Demultiplexer

Models

| Model | Description |
|------------------|---|
| MDM-7016-CWDM-LC | Singlemode 1270 to 1610nm, LC input/output ports, LC com port, dual slot card |

- Works as multiplexer or demultiplexer

Connection Diagram

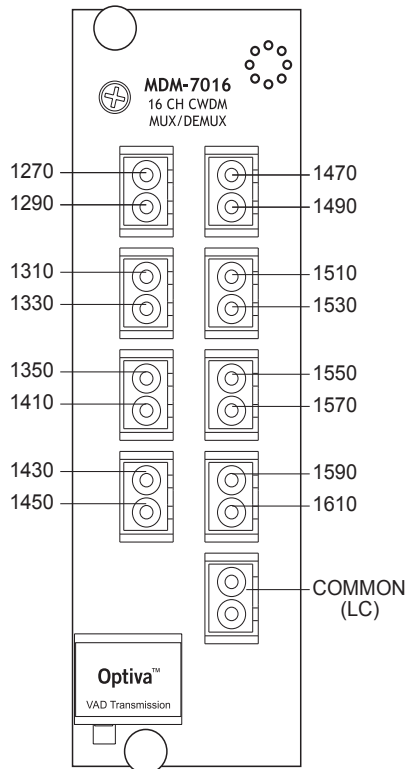


Specifications

| Specifications | Values |
|----------------------------|--|
| Wavelengths | 1270, 1290, 1310, 1330, 1350, 1410, 1430, 1450, 1470, 1490, 1510, 1530, 1550, 1570, 1590, 1610nm |
| Insertion Loss | < 3.0 dB |
| Fiber Type | Singlemode |
| Optical Return Loss | 50 dB |
| Port Isolation | 30 dB (Adjacent Channel) 40 dB (Non-Adjacent Channel) |
| I/O Port Optical Connector | LC |
| Com Port Optical Connector | LC |

General

| Specifications | Values |
|--------------------------|--------------------------|
| Dimensions (Insert Card) | 6.3"D x 1.6"W x 4.0"H |
| Weight | 13 oz. |
| Operating Temperature | -20°C to +70°C |
| Storage Temperature | -40°C to +85°C |
| Humidity | 0% to 95% non-condensing |
| Power Consumption | None (passive device) |
| System Latency | None |
| Warranty | 3 Year |

Enclosure Options

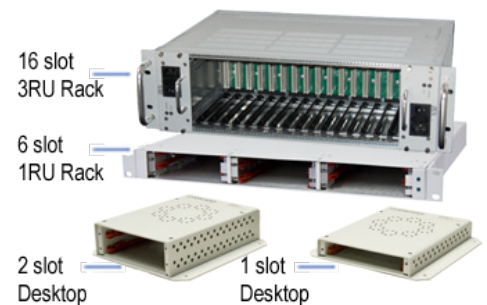

Compliance

